


CAN

Pin	Signal
1	12V
2	CANH
3	CANL
4	GND




I²C

Pin	Signal
1	5V
2	SDA
3	SCL
4	GND

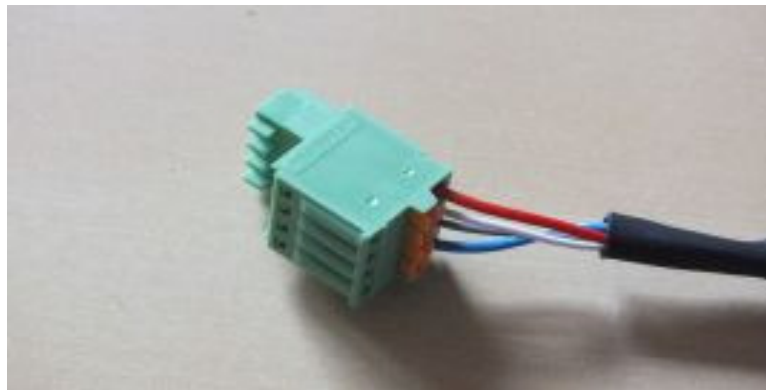

Power

Pin	Signal
1	5V
2	SDA

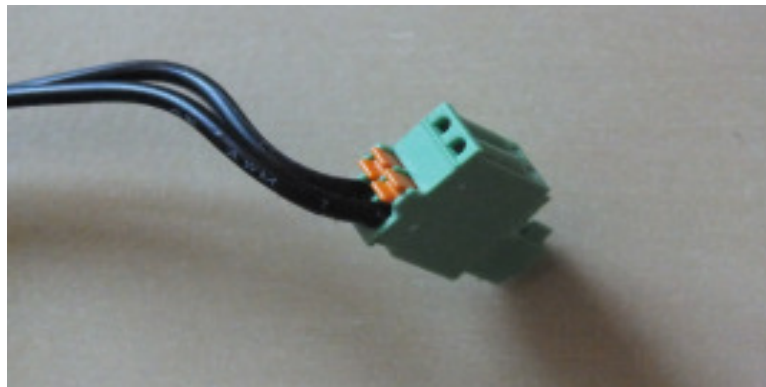

UART

Pin	Signal
1	Rx (Mikrocontroller)
2	GND
3	Tx (Mikrocontroller)